


Pneumatic Diaphragm Pump

P75BY - 3" / 75mm Ball Valve



Red Series - P75BR FRAS (Fire Retardant Antistatic) Nylon Body-Hytrel Elastomers- For Explosive Environment-ATEX M1 Rating

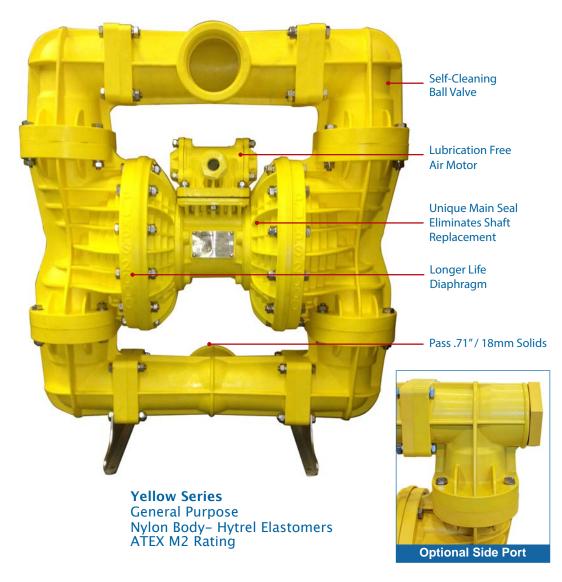

Blue Series - P75BB Polypropylene Body-Santoprene Elastomers-For Acids, Caustics, Chemicals- ATEX M2 Rating

Other materials are available to suit your specific application

Features

- > Patented design components
- > Simple design with fewer wear parts
- > Large particle handling
- > Low air consumption
- > Lightweight
- > Rugged & impact resistant
- > Lubrication free
- > No end of life can always be repaired
- > ATEX M1 and M2 certified
- > Low noise levels

Benefits


- > Increased productivity
- > Reduced costs pays for itself
- > Increased reliability & longer life
- > Less downtime & maintenance
- > Easier to diagnose & repair
- > Save on energy costs more air available for other equipment
- > Fewer injuries
- > No pollutants (oil free)
- > Safe for hazardous environments

DELTA

Delta Industrial Australia Pty Ltd E: sales@deltaindustrial.com.au


W: www.deltaindustrial.com.au **P:** +61 447 515 126

P75BY - 3" / 75mm Ball Valve



Ball Valve

"Pumps 2000" pneumatic diaphragm pumps were specifically designed for harsh mining duties to outperform and outlast the competition due to a number of patented design features. The light weight feature provides ease of mobility and reduces the risk of injury. Low air consumption and long lasting lubrication free parts means low cost running and reduced maintenance. *Ideally suited for pumping applications in all industries*.

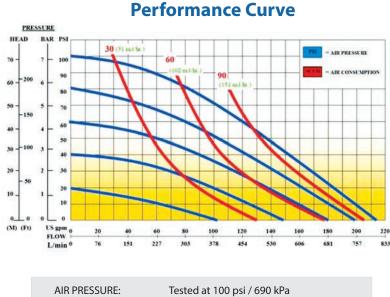

| AIR PRESSURE: | Tested at 100 psi / 690 kPa (not to exceed 125 psi / 861 kPa) |
|--------------------|---|
| FLOW RATE: | 0-213 gpm / 806 Lpm |
| FLUID CONNECTION: | 3" / 75mm (Internal Thread) |
| AIR INLET PORT: | 1/2" / 15mm (Internal Thread) |
| EXHAUST PORT: | 3/4" / 19mm (Internal Thread) |
| DELIVERY PRESSURE: | Tested to 87 psi / 600 kPa |
| SUCTION LIFT: | Tested to 19'/ 6m dry and 31'/ 9m wet |
| SOLIDS HANDLING: | .71″/18mm |
| PUMP WEIGHT: | Yellow Series – 65 lbs / 29kg Red (FRAS) Series – 75 lbs / 34kg Blue Series – 57 lbs / 26kg |

Pumps 2000 (International) 6-12 Burleigh Street Toronto 2283 N.S.W., Australia Tel: +61 2 49599400 Fax: +61 2 49504927 info@pumps2000.com Pumps 2000 (America) 1721 Main Street Pittsburgh, PA 15215 Tel: 412.963.9200 1.800.245.6211 Fax: 412.963.9214 info@pumps2000america.com Pumps 2000 (Europe)

Sunderland Tyne & Wear, SR1 2NQ United Kingdom Tel: +44 (0) 191 5675488 Fax: +44 (0) 191 5678512 info@pumps2000europe.com



www.pumps2000.com

www.pumps2000america.com |

www.pumps2000europe.com

Delta Industrial Australia Pty Ltd E: sales@deltaindustrial.com.au W: www.deltaindustrial.com.au P: +61 447 515 126

DELTA