




Accessories 4-way evacuation valve and flow regulator chamber




The 4-way evacuation valve is used for extraction and discharge of waste oil fluid hydraulic gear and engine oil and antifreeze

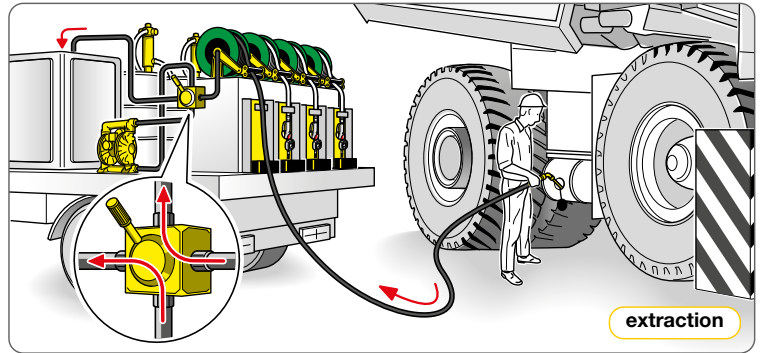

Art. 38130
4-way evacuation valve with connection F 3/4" G

Art. 38131
4-way evacuation valve with connection F 1" G

Art. 38132
4-way evacuation valve with connection F 1.1/2" G

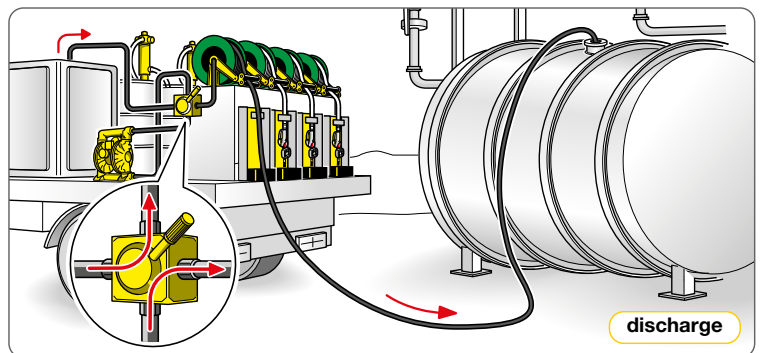

Article	Seals	Connection	Pressure	Weight
38130	Viton®	F 3/4"	14 bar	3 kg
38131	Viton®	F 1"	14 bar	3 kg
38132	Viton®	F 1.1/2"	14 bar	3 kg



Art. 38097

Flow regulator chamber F 3/4" x F 3/4" equipped with:


- one-way valve eliminates sudden pressure changes, ensuring a regular flow
- suitable for R 1:1 - 3:1 - 5:1 pumps
- max pressure 100 bar

Art. 38098


Flow regulator chamber F 3/4" x F 3/4" with air tank equipped with:

- one-way valve eliminates sudden pressure changes, ensuring a regular flow
- suitable for pumps till R 20:1
- max pressure 100 bar


Pressure trend of oil pump outlet

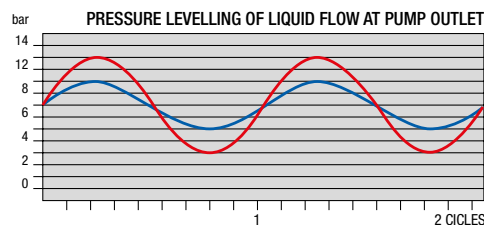

with pump R 3:1 - 8 bar
■ without chamber Art. 38097
■ with chamber Art. 38097

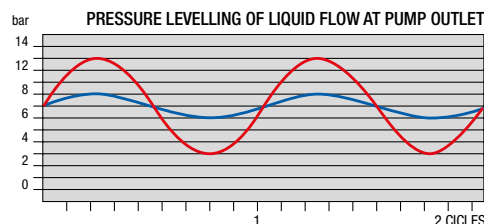

with pump R 3:1 - 8 bar
■ without chamber Art. 38098
■ with chamber Art. 38098

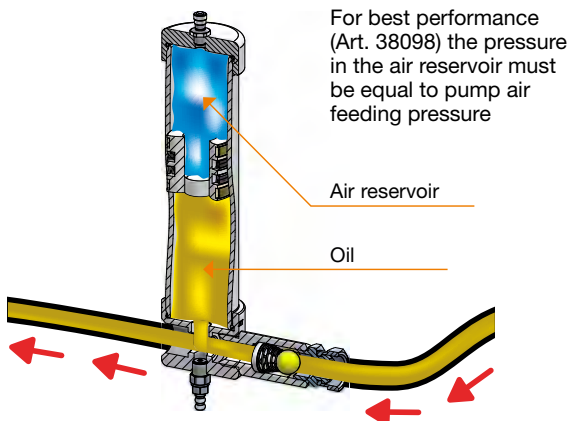



ADVANCED FLUID
MANAGEMENT SOLUTIONS

RAASM S.p.a.

Via Marangoni 33, 36022
S. Zeno di Cassola (VI) Italy
Tel. +39 0424 570891
info@raasm.com

P/N 38131

4 way evacuation valve, G 1" (f) connection

AREAS OF USE

Aeronautics, Agriculture, Automotive, Cleaning,
Building and road construction, Manufacturing industry,
Mining industry, Shipping and offshore, Railway
transport

FEATURES

